

## Toledo Mirage E115

ToLEDo Mirage E115 105LM E27 SL

0029944



### Product features

- A perfect choice for hospitality, decorative and mood lighting applications
- Unique and innovative lamp design and construction
- Low-lumen output to create the low-lit effect and gives no glare
- Low power construction: only 2.5W
- Perfect for SylPendant fixtures - a range of unique and elegant E27 lamp pendants, available in copper, brass, black and white finish
- Candlelight 2000K colour temperature creates a warm and cosy ambience
- High colour rendering - CRI80
- High quality, scratch and temperature resistant golden tinted glass envelope
- 25,000 hours of average rated life. Last 25 times longer than incandescent lamps
- Omni-directional light distribution
- Non-dimmable
- More than 100,000X switching cycles
- 3 years warranty



## PRODUCT OVERVIEW

Product name	ToLEDo Mirage E115 105LM E27 SL
Technology	LED
Watt (Rated) (W)	2.5
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
E-number FI	4740683
Warranty	3 years
Useful luminous flux (Fuse)	105
Luminous flux (lm)	105
Correlated colour temperature (k)	2000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Power consumption (W)	2.5
Wattage (W)	2.5
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288299440

## DATA TABLE

### General data

Product name	ToLEDo Mirage E115 105LM E27 SL
Technology	LED
Watt (Rated) (W)	2.5

## Toledo Mirage E115

ToLEDo Mirage E115 105LM E27 SL

0029944

Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740683
Warranty	3 years

### Optical data

Useful luminous flux (Fuse)	105
Luminous flux (lm)	105
Luminous flux (Rated) (lm)	105
Correlated colour temperature (k)	2000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Power consumption (W)	2.5
Wattage (W)	2.5
Equivalent watt (W)	12
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	0.2
Inrush Duration (µs)	8000
Lamp Energy Label (class)	G
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

### Physical data

Nominal Product Length (mm)	347
Nominal Product Diameter (mm)	116

## Toledo Mirage E115

ToLEDo Mirage E115 105LM E27 SL  
0029944

Weight (kg)	0.29
-------------	------


### Packaging

Product EAN number	5410288299440
Packaging single length / height (cm)	37.0
Packaging single width (cm)	12.6
Packaging single depth (cm)	12.6
DUN14 (inner)	15410288299447
Units per outer package	4
Packaging outer length / height (cm)	27.0
Packaging outer width (cm)	27.0
Packaging outer depth (cm)	39.5

### Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures


## PHOTOMETRY

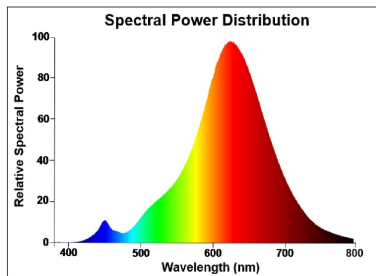


## TECHNICAL DRAWINGS

## Toledo Mirage E115

ToLEDo Mirage E115 105LM E27 SL  
0029944

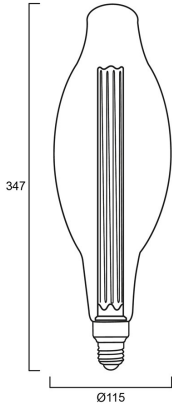

0029944

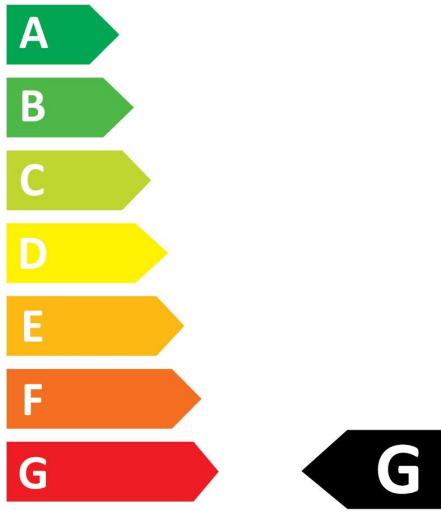

**3**  
kWh/1000h



2019/2015

Toledo Mirage E115  
*ToLEDo Mirage E115 105LM E27 SL*  
0029944



0029944



**3**  
kWh/1000h



2019/2015