

Toledo Mirage ST64

ToLEDo Mirage ST64 125LM E27 SL
0029905



Product features

- A perfect choice for hospitality, decorative and mood lighting applications
- Unique and innovative lamp design and construction
- Low-lumen output to create the low-lit effect and gives no glare
- Low power construction: only 2.5W
- Perfect for SylPendant fixtures - a range of unique and elegant E27 lamp pendants, available in copper, brass, black and white finish
- Candlelight 2000K colour temperature creates a warm and cosy ambience
- High colour rendering - CRI80
- High quality, scratch and temperature resistant golden tinted glass envelope
- 25,000 hours of average rated life. Last 25 times longer than incandescent lamps
- Omni-directional light distribution
- Non-dimmable
- More than 100,000X switching cycles
- 3 years warranty



NOTES

undefined

PRODUCT OVERVIEW

Product name	ToLEDo Mirage ST64 125LM E27 SL
Technology	LED
Watt (Rated) (W)	2.5
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
ETIM Class	EC001959
E-number FI	4740635
Warranty	3 years
Useful luminous flux (Fuse)	125
Luminous flux (lm)	125
Correlated colour temperature (k)	2000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Power consumption (W)	2.5
Wattage (W)	2.5
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288299051

Toledo Mirage ST64

ToLEDo Mirage ST64 125LM E27 SL
0029905

DATA TABLE

General data

Product name	ToLEDo Mirage ST64 125LM E27 SL
Technology	LED
Watt (Rated) (W)	2.5
Cap/Base	E27
Fixture rating	Open
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740635
Warranty	3 years

Optical data

Useful luminous flux (Fuse)	125
Luminous flux (lm)	125
Luminous flux (Rated) (lm)	125
Correlated colour temperature (k)	2000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

Electrical data

Power consumption (W)	2.5
Wattage (W)	2.5
Equivalent watt (W)	13
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	0.2
Inrush Duration (µs)	8000
Lamp Energy Label (class)	G
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	25000
------------------	-------

Toledo Mirage ST64

ToLEDo Mirage ST64 125LM E27 SL
0029905

Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

Physical data

Nominal Product Length (mm)	142
Nominal Product Diameter (mm)	64
Weight (kg)	0.081


Packaging

Product EAN number	5410288299051
Packaging single length / height (cm)	16.1
Packaging single width (cm)	7.1
Packaging single depth (cm)	7.1
DUN14 (inner)	15410288299058
Units per outer package	6
Packaging outer length / height (cm)	23.0
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	18.5

Safety data


Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

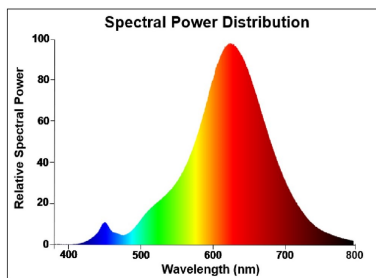

TECHNICAL DRAWINGS

Toledo Mirage ST64
ToLEDo Mirage ST64 125LM E27 SL
0029905



0029905



3
kWh/1000h




2019/2015

Toledo Mirage ST64
ToLEDo Mirage ST64 125LM E27 SL
0029905



0029905

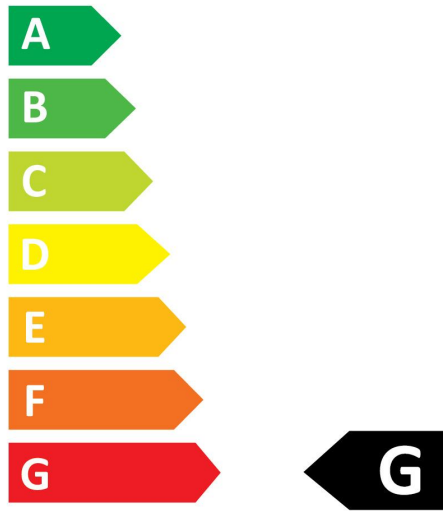

3
kWh/1000h



2019/2015